



INTERCHANGEABLE LENS DUAL LAMP DLP PROJECTOR LX-MU700

Recommended for:

- Conference Rooms
- Board Rooms
- Large Classrooms
- Auditoriums
- Lecture Halls
- Digital Signage
- Houses of Worship



PROJECTORS.USA.CANON.COM

HIGH BRIGHTNESS WITH HIGH RELIABILITY

The LX-MU700 brings high brightness images, efficiency and reliability to large venues in business, higher education, houses of worship and more. This model utilizes a dual lamp system to achieve a brightness of 7500 Lumens*, while also enhancing reliability by helping to minimize projector downtime – a key factor for units installed in areas that may be challenging to access.

DUAL LAMP SYSTEM



- **7500 Lumen* Brightness** – ideal for large halls and auditoriums, even in bright ambient conditions
- **Reliability** – avoid mid-presentation interruptions by switching from two lamps to one should one lamp go out

KEY FEATURES

- 7500 Lumens*
- Dual Lamp System
- WUXGA (1920 x 1200)
- DLP Technology
- Seven Optional Lenses
- Motorized Lens Shift, Zoom and Focus
- Two Interchangeable Color Wheels (Brightness vs. Color Priority)
- HDBase™, HDMI, DVI and RJ-45
- Crestron, AMX and Extron Compatibility

DLP HDBT™

HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

*When using Dual Lamps, Standard Zoom Lens LX-IL03ST, 6 Segment-BRT color wheel and Lamp Mode is Normal.


SPECIFICATIONS

PROJECTION SYSTEM	
Imaging Device	0.67" DMD x1
Aspect Ratio	16:10
Native Resolution	1920 x 1200 (WUXGA)
Brightness ^{2,3}	7500 Lumens (Dual Lamp, Lamp Mode: Normal)
Contrast ²	2100:1
Digital Keystone	±40°
Uniformity ²	85%
IMAGE ADJUSTMENTS	
Image Mode	Presentation / Standard / Video
Mounting	Front table / Rear table / Front ceiling / Rear ceiling / Upward & Downward
Adjustable Feet	Front: 2, Rear: 1
INPUT SIGNALS	
Scanning Frequency	H: 15.62 – 91.15 kHz, V: 24 – 85.06 Hz
Analog PC Input	WUXGA / WSXGA+ / UXGA / SXGA+ / WXGA+ / WXGA / SXGA / XGA / SVGA / VGA
Digital PC Input	WUXGA / WSXGA+ / UXGA / SXGA+ / WXGA+ / WXGA / SXGA / XGA / SVGA / VGA
Digital Video Input	1080p / 1080i / 720p / 576p / 480p
Component Video Input	1080p / 1080i / 720p / 576p / 480p / 576i / 480i
Dot Clock	157.5 MHz
LAMP	
Type	Super-high Pressure Lamp (x2)
Life	2000 Hours (Normal) / 4000 Hours (Eco)
Lamp Power ¹	350 / 280W (x2)

DIMENSIONS



CONNECTABILITY

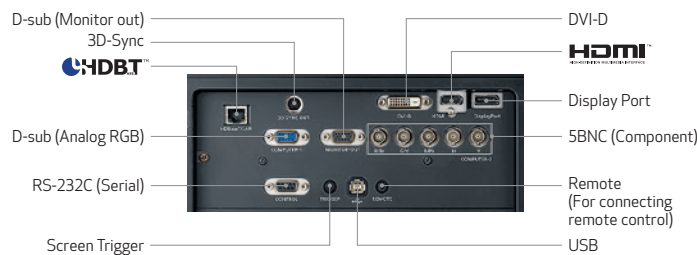

WHAT'S IN THE BOX

- Projector
- Dust Cap
- Power Cord
- Color Wheel BRT (Brightness priority)⁵
- Color Wheel COL (Color priority)⁶
- VGA to VGA Connection Cable (Mini Dsub15-Mini Dsub15)
- Projector Remote Control LX-RC01 (includes two AA batteries)
- Anti-theft Screw for Lens
- Important Information (book)
- User's Manual (CD-ROM)
- Warranty Card

¹Lamp Mode is Normal/Eco ²When using Standard Zoom Lens (LX-IL03ST) ³When 6 Segment-BRT color wheel is installed (gives priority to brightness) ⁴Standby mode is Network/Eco ⁵Excluding lens ⁶6 Segment-BRT color wheel is optimized for brightness and preinstalled. Use the optional, bundled 6 Segment-COL color wheel for optimal color. ⁷Indicates focus ability range in the chart. Optical feature guaranteed range is: 50 – 300" ⁸Calculated value for 80" image

© 2015 Canon U.S.A., Inc. All rights reserved. Not responsible for typographical errors. Specifications subject to change without notice. Products not shown to scale. Certain images and effects are simulated. Canon is a trademark of Canon Inc. in the United States, and may be a registered trademark or trademark in other countries. HDBaseT™ and the HDBaseT Alliance logo are trademarks of the HDBaseT Alliance. HDMI, the HDMI logo and High-Definition Multimedia Interface are registered trademarks or trademarks of HDMI Licensing, LLC in the United States and/or other countries. All other product names and brand names may be registered trademarks, trademarks or service marks of their respective owners in the United States and/or other countries.

TERMINALS	
Dsub15 (Computer-1)	Analog PC / Component Video Input
SBNC (Computer-2)	Analog PC / Component Video Input
DVI-D	Digital PC / Digital Video Input
HDMI	Digital PC / Digital Video Input
DisplayPort	Digital PC / Digital Video Input
RJ-45	HDBaseT™ Input / Network Connection (100BASE-TX / 10BASE-T)
Dsub15 (Monitor-out)	Image Output
Dsub9 (Control)	RS-232 Connection
USB Mini B	Service Port
3D Sync Out	For 3D Display
Mini Jack (Trigger)	For Picture Control
Mini Jack (Remote)	Wired Remote Control Connection
REMOTE CONTROL	
Wireless Remote	IR
RATINGS	
Fan Noise ¹	Dual Lamp: 41 / 36dB, Single Lamp: 38 / 35dB
Power Consumption ¹	Dual Lamp: 850 / 680W, Single Lamp: 440 / 370W
Standby Power ⁴	6.0 / 0.5W
Power Voltage	AC 100 – 240V, 50 / 60 Hz
Operating Temperature	40°F – 104°F
Dimensions (W x H x D)	19.8" x 8.7" x 20.8" / 504mm x 221mm x 529mm (including adjustable legs)
Weight ⁵	45.2 lbs.
Projector Warranty	3 Years (parts and labor)
Lamp Warranty	120 Days

OPTIONAL LENSES

	PROJECTION LENS	LENS SHIFT	FOCUS	SCREEN SIZE ⁷	THROW RATIO ⁸	ZOOM RATIO
Ultra Wide Zoom Lens LX-IL01UW ITEM CODE: 0951C001	F1.96 – 2.3 f= 11.3 – 14.1mm	V: 0 – 50% H: ±6.7%	Powered	40 – 500"	0.75 – 0.93:1	1.25x
Wide Zoom Lens LX-IL02WZ ITEM CODE: 0947C001	F1.85 – 2.5 f= 18.7 – 26.5mm	V: 0 – 50% H: ±10%	Powered	40 – 500"	1.25 – 1.79:1	1.41x
Standard Zoom Lens LX-IL03ST ITEM CODE: 0948C001	F1.7 – 1.9 f= 26 – 34mm	V: 0 – 50% H: ±10%	Powered	40 – 500"	1.73 – 2.27:1	1.3x
Middle Zoom Lens LX-IL04MZ ITEM CODE: 0949C001	F1.86 – 2.48 f= 32.9 – 54.2mm	V: 0 – 50% H: ±10%	Powered	40 – 500"	2.22 – 3.67:1	1.65x
Long Zoom Lens LX-IL05LZ ITEM CODE: 0944C001	F1.85 – 2.41 f= 52.9 – 79.1mm	V: 0 – 50% H: ±10%	Powered	40 – 500"	3.58 – 5.38:1	1.5x
Ultra Long Zoom Lens LX-IL06UL ITEM CODE: 0945C001	F1.85 – 2.48 f= 78.5 – 121.9mm	V: 0 – 50% H: ±10%	Powered	40 – 500"	5.31 – 8.26:1	1.55x
Short Fixed Lens LX-IL07WF ITEM CODE: 0946C001	F1.85 f= 11.6mm	V: 0% H: 0%	Powered	40 – 500"	0.76:1	Fixed

ACCESSORIES

ITEM	ITEM CODE
Ceiling Mount Adapter RS-CL15	0964C001
Projector Remote Control LX-RC01	0954C001
Replacement Lamp LX-LP01	0953C001
Replacement Air Filter LX-FL01	0950C001