


Revolabs Inc. FLX Accessory Cable Guide

Revolabs offers a variety of accessory cables as part of our product line. These cables allow you to easily connect your FLX system to a variety of video codecs, computers, and other audio solutions for a complete UC Solution.

The Revolabs FLX Conference Phone offers 3.5mm balanced inputs and outputs. This connector is often confused with a 3.5mm stereo connector, as it appears the same, but is wired very differently. The Revolabs FLX Base Station can accept a balanced or unbalanced 3.5mm plug but will not accept a stereo 3.5mm plug. The Use of a stereo 3.5mm plug into the FLX Base Station will result in either poor audio or no audio at all depending on what device is connected at the other end of the cable.

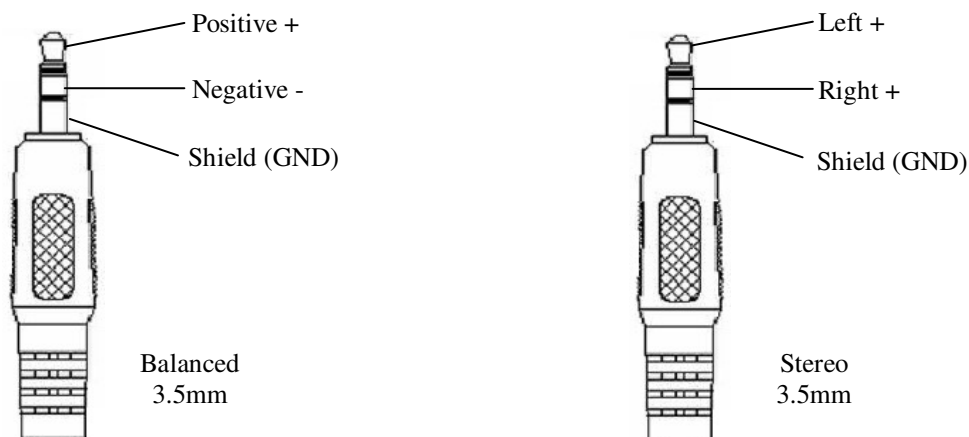

Below are the specifications for each cable as well as a cross-reference guide for different UC solutions. Please use the cross-reference guide below to determine the appropriate cable for your UC solution.

If you have any questions about which cable to use or would like to find out how you can purchase the correct cable please call Revolabs at 1-800-326-1088.

Brand	Codec	FLX OUT Connects TO:	Level	Cable	FLX IN Connects TO:	Cable
Lifesize	LG Executive	Mic Input	Mic	07-35MUTO35MU-01	Line Output	07-35MUTO35MS-01
Lifesize	Passport	Mic Input	Mic	07-35MUTO35MU-01	Line Output	07-35MUTO35MS-01
Lifesize	Passport Connect	Mic Input	Mic	07-35MUTO35MU-01	Line Output	07-35MUTO35MS-01
Lifesize	Express 200	Mic Input	Mic	07-35MUTO35MU-01	Line Output	07-35MUTO35MS-01
Lifesize	Express 220	Mic Input	Mic	07-35MUTO35MU-01	Line Output	07-35MUTO35MS-01
Lifesize	Room	Input 1	Mic	07-35MUTORCA-01	Line Output	07-35MUTODRCA-01
Lifesize	Room 200	Mic Input	Mic	07-35MUTO35MU-01	Line Output	07-35MUTODRCA-01
Lifesize	Room 220	Mic Input	Mic	07-35MUTO35MU-01	Line Output	07-35MUTO35MS-01
Lifesize	Team 200	Mic Input	Mic	07-35MUTO35MU-01	Line Output	07-35MUTO35MS-01
Lifesize	Team 220	Mic Input	Mic	07-35MUTO35MU-01	Line Output	07-35MUTO35MS-01
LG	RVF1000	Mic Input	Mic	07-35MUTO35MU-01	Line Output	07-35MUTO35MS-01
Polycom	HDX7000	Main Line Input 1	Line	07-35MUTODRCA-01	Line Output	07-35MUTODRCA-01
Polycom	HDX8000	Main Line Input 1	Line	07-35MUTODRCA-01	Line Output	07-35MUTODRCA-01
Polycom	HDX9000	Main Line Input L	Line	07-35MBTOMPHX-01	Line Output L	07-35MBTOMPHX-01
Polycom	QDX6000	Main Line Input 1	Line	07-35MUTODRCA-01	Line Output	07-35MUTODRCA-01
Polycom	FX	Mono Line Input	Line	07-35MUTORCA-01	Line Output	07-35MUTODRCA-01
Polycom	VSX7000e	Main Line Input 1	Line	07-35MUTODRCA-01	Line Output	07-35MUTODRCA-01
Polycom	VSX7000s	Main Line Input 1	Line	07-35MUTODRCA-01	Line Output	07-35MUTODRCA-01
Polycom	VSX8000	Main Line Input L	Line	07-35MBTOMPHX-01	Line Output L	07-35MBTOMPHX-01
Tandberg	C20	Mic Input	Mic	07-35MBTO35M4-01	Line Output	07-35MUTODRCA-01
Tandberg	C40	Mic Input	Mic	07-35MBTOXLR-01	Line Output	07-35MUTODRCA-01
Tandberg	C60	Mic Input	Mic	07-35MBTOXLR-01	Line Output	07-35MUTODRCA-01
Tandberg	C90	Mic Input	Mic	07-35MBTOXLR-01	Line Output	07-35MUTODRCA-01
Tandberg	Edge	Mic Input	Mic	07-35MBTOXLR-01	Line Output	07-35MUTODRCA-01
Tandberg	3000 MXP	Mic Input	Mic	07-35MBTOXLR-01	Line Output	07-35MUTODRCA-01
Tandberg	6000 MXP	Mic Input	Mic	07-35MBTOXLR-01	Line Output	07-35MUTODRCA-01
PC Audio	USB Audio Adapter	Mic Input	Line	07-35MUTO35MU-01	Line Output	07-35MUTO35MS-01
Sony	XG-80	Mic Input	Mic	07-35MUTO35MU-01	Line Output	07-35MUTODRCA-01
Sony	PCS-G70	Mic Input	Mic	07-35MUTO35MU-01	Line Output	07-35MUTODRCA-01
Sony	PCS-HG90	Mic Input	Mic	07-35MBTOXLR-01	Line Output	07-35MUTODRCA-01
Sony	PCS-G50	Mic Input	Mic	07-35MUTO35MU-01	Line Output	07-35MUTODRCA-01
Sony	PCS-1	Mic Input	Mic	07-35MUTO35MU-01	Line Output	07-35MUTORCA-01
Panasonic	KX-VC600	Audio In L/R	Line	07-35MUTODRCA-01	Line Output	07-35MUTODRCA-01
Panasonic	KX-VC500	Audio In L/R	Line	07-35MUTODRCA-01	Line Output	07-35MUTODRCA-01
Panasonic	KX-VC300	Audio In L/R	Line	07-35MUTODRCA-01	Line Output	07-35MUTODRCA-01

3.5mm Balanced Male Connector to 3.5mm Balanced Male Connector

Part# 07-35MBTO35MB-01



Tip = Positive +
Ring = Negative -
Sleeve = Shield (GND)

Tip = Positive +
Ring = Negative -
Sleeve = Shield (GND)

3.5mm Unbalanced Male Connector to RCA Male Connector

Part# 07-35MUTORCA-01



Tip = Positive +
Sleeve = Shield (GND)

Tip = Positive +
Sleeve = Shield (GND)

3.5mm Unbalanced Male Connector to Dual RCA Male Connector

Part# 07-35MUTODRCA-01



Tip = Positive +
Sleeve = Shield (GND)

Tip = Positive +
Sleeve = Shield (GND)
Both connectors are equal.

3.5mm Balanced Male Connector to 3-Pin Mini Phoenix Connector

Part# 07-35MBTOMPHX-01



Tip = Positive +
Ring = Negative -
Sleeve = Shield (GND)

Left = Positive +
Center = Negative -
Right = Shield (GND)

3.5mm Unbalanced Male Connector to 3.5mm Unbalanced Male Connector

Part# 07-35MUTO35MU-01



Tip = Positive +
Sleeve = Shield (GND)

Tip = Positive +
Sleeve = Shield (GND)

3.5mm Balanced Male Connector to Male XLR Connector

Part# 07-35MBTOXLR-01



Tip = Positive +
Ring = Negative -
Sleeve = Shield (GND)

Pin 1 = Shield (GND)
Pin 2 = Positive +
Pin 3 = Negative -

3.5mm Balanced Male Connector to 3.5mm Male 4 Conductor

Part# 07-35MBTO35M4-01



Tip = Positive +
Ring = Negative -
Sleeve = Shield (GND)

Tip = Positive +
Ring 1 = empty
Ring 2 = Negative -
Sleeve = Shield (GND)

3.5mm Unbalanced Male Connector to 3.5mm Stereo Male Connector

Part# 07-35MUTO35MS-01



Tip = Positive +
Sleeve = Shield (GND)

Tip = Positive +
Ring = Positive +
Sleeve = Shield (GND)