




## 907xl

Stereo Audio Power Amplifier/Mixer (40 Watts per Channel)

---

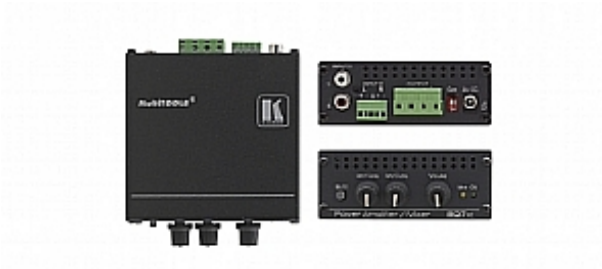

The **907xl** is a high-performance power amplifier for line-level stereo audio signals. It accepts a balanced stereo audio signal on a terminal block connector and an unbalanced stereo signal on RCA connectors. It delivers 40 watts per channel into an 8Ω load.

### FEATURES

---

- High Efficiency - Class D operation.
- Controls - 1 volume control knob for each input & mute button.
- Gain Control DIP-Switches.
- Mute and On Indicator LEDs.
- Compact MultiTOOLS® - Up to 4 units can be rack mounted side-by-side in a 1U rack space with the optional RK-1 universal rack adapter.



907xl

TECHNICAL SPECIFICATIONS

INPUT: 1 balanced stereo audio on a terminal block connector, 1 unbalanced stereo audio on RCA connectors.

OUTPUT: Speaker output on a terminal block connector.

OUTPUT POWER: 40W per channel into 8Ω.

OUTPUT MUSIC POWER: 150W per channel into 8Ω.

INPUT SENSITIVITY: 1.2Vrms.

AMPLIFIER TYPE: Class D.

VOLTAGE GAIN: 36dB (x10).

BANDWIDTH (-3dB): 25kHz.

S/N RATIO: 66dB.

COUPLING: Inputs: AC, Outputs: DC.

AUDIO THD + NOISE: 1.2%.

AUDIO 2nd HARMONIC: 1%.

POWER CONSUMPTION: 24V DC, 2.2A.

CONTROLS: 2 gain DIP-switches, mute button, 2 input level knobs, 1 volume knob.

OPERATING TEMPERATURE: 0° to +55°C (32° to 131°F).

STORAGE TEMPERATURE: -45° to +72°C (-49° to 162°F).

HUMIDITY: 10% to 90%, RHL non-condensing.

DIMENSIONS: 10.7cm x 10.4cm x 4.0cm (4.2" x 4.1" x 1.6").

WEIGHT: 0.32kg (0.7lbs).

ACCESSORIES: Power supply.

OPTIONS: RK-1 19" rack mount adapter.

