


PRODUCT BULLETIN

#18101

CW Series Permanent Installation Speaker Cables

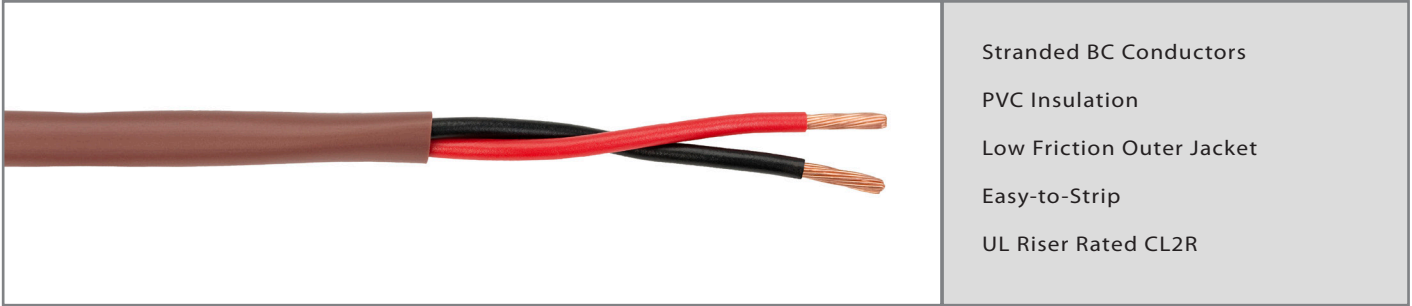

- Stranded BC Conductors
- PVC Insulation
- Low Friction Outer Jacket
- Easy-to-Strip
- UL Riser Rated CL2R

Part Number Overview

Part Number: **CW Series** (see below for variations)
Description: Permanent Installation Speaker Cables

Materials


CONDUCTORS	(2) Stranded BC (see below for gage types)
INSULATION	PVC, .015" (red & black)
JACKET	PVC
COLOR	Brown

Performance Characteristics

UL Rating	Temperature Range
CL2R	-20°C to 75°C

Product Variations

Part Number	Conductor Gage	DC Resistance	Overall Diameter	Bend Radius	Weight
CW1202	12AWG (19x25)	1.8 Ω/Mft	.250"	2.5"	59 lbs/Mft
CW1402	14AWG (19x27)	2.8 Ω/Mft	.210"	2.1"	37 lbs/Mft
CW1602	16AWG (19x29)	4.5 Ω/Mft	.182"	1.8"	26 lbs/Mft
CW1802	18AWG (19x30)	6.0 Ω/Mft	.166"	1.6"	19 lbs/Mft

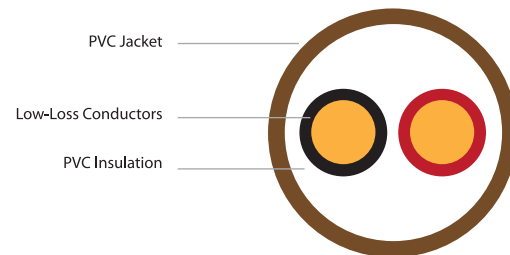

The CW series is an easy-to-install, commercial grade speaker cable for permanent installation in walls or conduit. Built with large gage copper conductors, the CW series minimizes power loss and attenuation through the cable. The outer jacket is extruded from a flexible PVC that is easy-to-strip and has a low friction finish that is easy to pull through conduit. UL rated type CL2R, the CW series can be installed variety of environments.