


# PRODUCT BULLETIN

#11201

## RS22G2 22AWG Dual-Pair Audio Cable

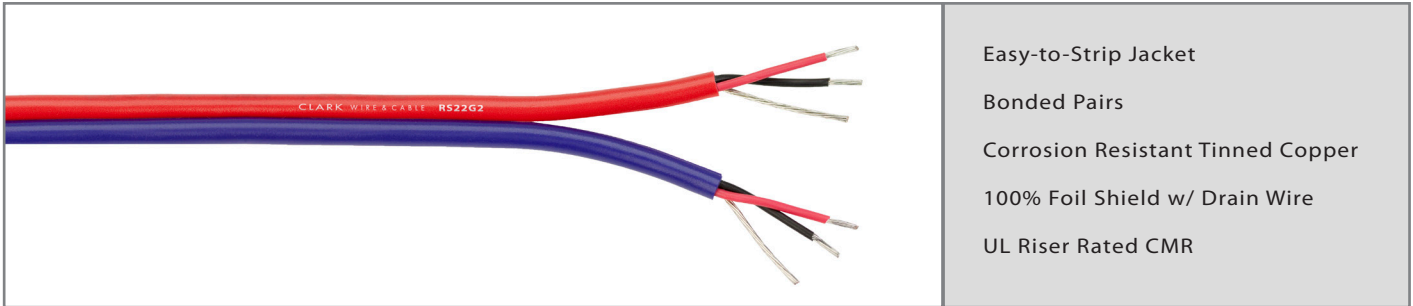


- Easy-to-Strip Jacket
- Bonded Pairs
- Corrosion Resistant Tinned Copper
- 100% Foil Shield w/ Drain Wire
- UL Riser Rated CMR

### Part Number Overview

Part Number: **RS22G2**  
Description: 22AWG Dual-Pair Audio Cable

### Materials & Dimensions

CONDUCTORS	(2) 22AWG (7 x 30) Stranded TC
INSULATION	Polypropylene, .008" wall, (one red, one black)
SHIELD	100% Foil with 22AWG (7 x 30) Stranded TC Drain Wire
NUMBER OF PAIRS	2 (bonded with full pair color coding)
JACKET	Flexible PVC, .137" x .278" O.D.
AVAILABLE COLORS	Black & Blue, Black & Grey, Black & Red, Red & Green, Red & Lavender, or Red & Grey

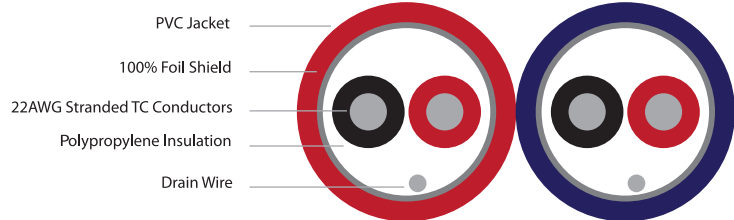

### Performance Characteristics

DC Resistance	Capacitance	Temperature Range	Weight	UL Listing
Conductor: 14.4 Ω/Mft Shield w/ Drain: 12.5 Ω/Mft	25.7 pF/ft between conductors 47.3 pF/ft between one conductor and other in common with shield	-20 °C to 75 °C	28 lbs/Mft	CMR

Clark's RS22G2 is a low-noise, dual-pair audio cable for balanced line level or microphone level applications. Easy to terminate, the RS22G2 features several timesaving features, such as a bonded easy-strip shield and tinned copper conductors that streamline the cable termination process. Excellent common-mode and RF/EMI noise rejection are achieved by a precision twisted pair and 100% foil shield. UL rated CMR for riser applications, the RS22G2 can be installed in a variety of permanent installation environments.