



Details about the Revolabs Fusion

The Revolabs Fusion Base Station, shown below in front and rear panel views, manages wireless audio signal processing, and pairing between the Revolabs microphones and the Fusion Base Station.

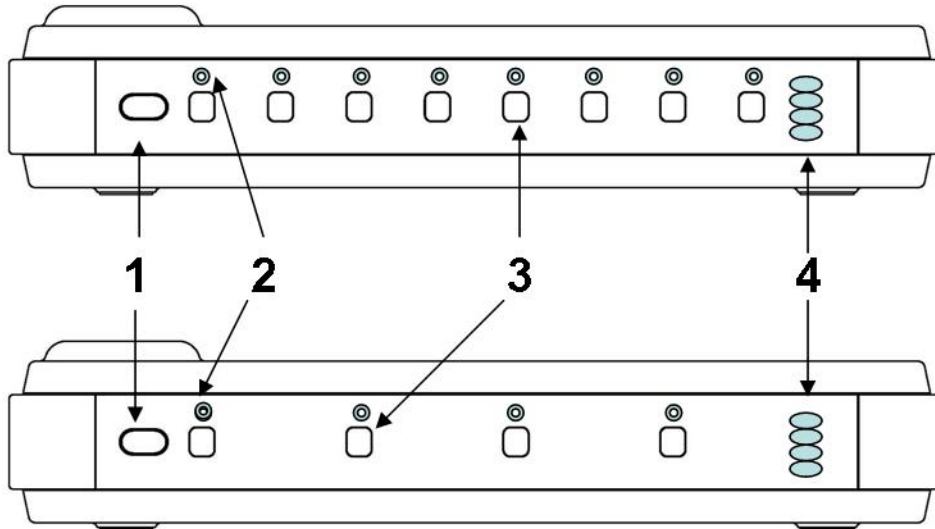

1. IR Remote receiver
2. LED indicators: Displays microphone mute and pairing states
3. Pairing Push Buttons: For pairing microphones to Base Station
4. Power On LED/Volume indicator

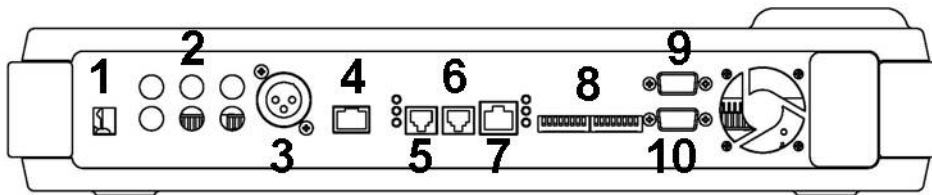

1. Power
2. 6 RCA Plugs
 - a. AUX IN
 - b. AUX OUT
 - c. RECORD OUT
 - d. ROOM OUT
 - e. CONFERENCE IN
 - f. CONFERENCE OUT
3. XLR
4. Network RJ 45 (Revolabs use only)
5. Telephone Line-in RJ11
6. Telephone Set-in RJ11
7. Audio Control RJ45 (Revolabs use only)
8. Programming Ports DIP Switches 1-16 for Multiple Fusion Systems
9. CP Programming DB9 (Revolabs use only)
10. IR Remote DB9 (Revolabs use only)